

推荐安装尺寸


Recommended Dimensions:

轴: h8 Shaft:h8

毂: H8 Hub:H8

类似JB/T 7934 Z2标准

Similar to JB/T 7934 Z2 Standard




尺寸 Dimensions					传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN912-12.9级锁紧螺钉 DIN912-12.9 Locking Screw		
							轴Shaft	毂Hub	数量 n	规格 Size	锁紧扭矩 Locking Torque
Φ d	Φ D	L1	L2	L	Ft	Mt	P	P1			s
mm	mm	mm	mm	mm	KN	Nm	N/mm	N/mm			Nm
19	47	17	20	26	31	298	286	116	8	M6x18	14.9
20	47	17	20	26	31	313	272	116	8	M6x18	14.9
22	47	17	20	26	31	345	247	116	8	M6x18	14.9
24	50	17	20	26	35	424	255	123	9	M6x18	14.9
25	50	17	20	26	35	441	245	123	9	M6x18	14.9
28	55	17	20	26	39	549	243	124	10	M6x18	14.9
30	55	17	20	26	39	588	227	124	10	M6x18	14.9
32	60	17	20	26	47	752	255	136	12	M6x18	14.9
35	60	17	20	26	47	822	233	136	12	M6x18	14.9
38	65	17	20	26	55	1042	250	146	14	M6x18	14.9
40	65	17	20	26	55	1097	238	146	14	M6x18	14.9
42	75	20	24	32	83	1740	291	163	12	M8x22	35
45	75	20	24	32	83	1864	271	163	12	M8x22	35
48	80	20	24	32	83	1988	254	153	12	M8x22	35
50	80	20	24	32	83	2071	244	153	12	M8x22	35
55	85	20	24	32	97	2658	259	168	14	M8x22	35
60	90		24	32	97	2900	238	158	14	M8x22	35
65	95	20	24	32	110	3587	250	171	16	M8x22	35
70	110	24	28	38	153	5345	268	171	14	M10x25	69
75	115	24	28	38	153	5727	250	163	14	M10x25	69
80	120	24	28	38	153	6108	235	156	14	M10x25	69
85	125	24	28	38	175	7417	252	172	16	M10x25	69
90	130	24	28	38	175	7854	238	165	16	M10x25	69
95	135	24	28	38	196	9326	254	179	18	M10x25	69
100	145	26	33	45	227	11362	258	178	14	M12x30	123.3
110	155	26	33	45	227	12498	234	166	14	M12x30	123.3
120	165	26	33	45	260	15578	245	178	16	M12x30	123.3
130	180	34	38	50	325	21095	217	156	20	M12x35	123.3
140	190	34	38	50	357	24993	221	163	22	M12x35	123.3
150	200	34	38	50	390	29217	225	169	24	M12x35	123.3
160	210	34	38	50	422	33756	229	174	26	M12x35	123.3
170	225	38	44	58	465	39483	212	160	22	M14x40	187
180	235	38	44	58	507	45606	218	167	24	M14x40	187
190	250	46	52	66	591	56163	199	152	28	M14x45	187
200	260	46	52	66	633	63342	203	156	30	M14x45	187
220	285	50	56	72	745	81960	200	154	26	M16X50	290
240	305	50	56	72	860	103162	211	166	30	M16X50	290
260	325	50	56	72	974	126669	221	177	34	M16X50	290
280	355	60	66	84	1124	157339	197	156	32	M18X60	400
300	375	60	66	84	1264	189653	207	166	36	M18X60	400
320	405	72	78	98	1651	264108	211	167	36	M20X70	580

推荐安装尺寸
Recommended Dimensions:

轴: h8 Shaft:h8
毂: H8 Hub:H8

类似JB/T 7934 Z2标准
Similar to JB/T 7934 Z2 Standard

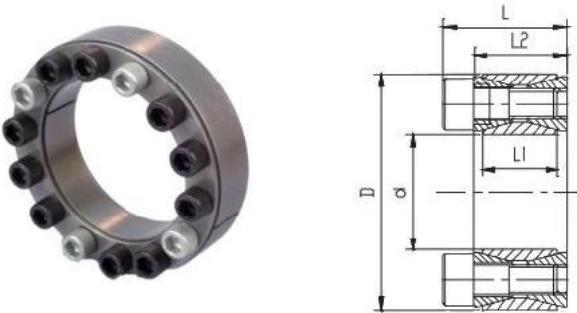

尺寸 Dimensions					传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN912-12.9级锁紧螺钉 DIN912-12.9 Locking Screw		
							轴Shaft	毂Hub	数量 n	规格 Size	锁紧扭矩 Locking Torque
							P	P1			s
φd	φD	L1	L2	L	Ft	Mt	N/mm	N/mm			Nm
mm	mm	mm	mm	mm	KN	Nm					
440	545	96	102	126	2634	579506	184	148	40	M24X90	1000
460	565	96	102	126	2634	605848	176	143	40	M24X90	1000
480	585	96	102	126	2766	663811	177	145	42	M24X90	1000
500	605	96	102	126	2898	724383	178	147	44	M24X90	1000
520	630	96	102	126	2963	770487	175	144	45	M24X90	1000
540	650	96	102	126	2963	800121	169	140	45	M24X90	1000
560	670	96	102	126	3161	885064	173	145	48	M24X90	1000
580	690	96	102	126	3293	954884	174	147	50	M24X90	1000
600	710	96	102	126	3293	987811	169	142	50	M24X90	1000
620	730	96	102	126	3424	1061550	170	144	52	M24X90	1000
640	750	96	102	126	3556	1137957	171	146	54	M24X90	1000
660	770	96	102	126	3688	1216963	172	147	56	M24X90	1000
680	790	96	102	126	3688	1253841	167	143	56	M24X90	1000
700	810	96	102	126	3951	1382913	173	150	60	M24X90	1000
720	830	96	102	126	3951	1422425	169	146	60	M24X90	1000
740	850	96	102	126	4083	1510688	169	148	62	M24X90	1000
760	870	96	102	126	4215	1601545	170	149	64	M24X90	1000
780	890	96	102	126	4280	1669384	169	148	65	M24X90	1000
800	910	96	102	126	4346	1738541	167	147	66	M24X90	1000
820	930	96	102	126	4478	1835982	168	148	68	M24X90	1000
840	950	96	102	126	4610	1936101	169	149	70	M24X90	1000
860	970	96	102	126	4741	2038809	169	150	72	M24X90	1000
880	990	96	102	126	4873	2144197	170	151	74	M24X90	1000
900	1010	96	102	126	4939	2222575	169	150	75	M24X90	1000
920	1030	96	102	126	5005	2302221	167	149	76	M24X90	1000
940	1050	96	102	126	5137	2414196	168	150	78	M24X90	1000
960	1070	96	102	126	5268	2528755	169	151	80	M24X90	1000
980	1090	96	102	126	5334	2613719	167	150	81	M24X90	1000
1000	1110	96	102	126	5400	2700000	166	149	82	M24X90	1000

推荐安装尺寸:


Recommended Dimensions:

轴: h8 Shaft:h8

毂: H8 Hub:H8

类似JB/T 7934 Z11标准

Similar to JB/T 7934 Z11 Standard



尺寸 Dimensions								传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		D IN912 - 12.9级锁紧螺钉 DIN912-1 2.9 Locking Screw		
										轴Shaft	毂Hub	数量	规格 Size	锁紧扭矩 Locking Torque
ϕd	ϕD	L1	L2	L3	L	D2	$\phi D1$	Ft	Mt	P	P1	n		Ts
mm	mm	mm	mm	mm	mm	mm	mm	KN	Nm	N/mm ²	N/mm			Nm
8	15	12	21	24	28	28	25	10	39	299	159	4	M4x10	5.2
9	16	14	23	27	31	32	28	10	44	227	128	4	M4x12	5
10	16	14	23	27	31	32	28	10	49	205	128	4	M4x12	5.2
11	18	14	23	27	31	34	30	10	53	186	114	4	M4x12	5
12	18	14	23	27	31	34	30	10	58	171	114	4	M4x12	5.2
14	23	14	23	27	31	39	35	10	68	146	89	4	M4x12	5
15	24	16	29	36	42	45	40	16	120	196	123	4	M6x18	17
16	24	16	29	36	42	45	40	16	128	184	123	4	M6x18	17
18	26	18	31	38	44	47	42	21	191	194	134	4	M6x18	17
19	27	18	31	38	44	48	43	21	202	183	129	4	M6x18	17
20	28	18	31	38	44	49	44	21	213	174	124	4	M6x18	17
22	32	25	38	45	51	54	48	21	234	114	78	4	M6x18	17
24	34	25	38	45	51	56	50	21	255	105	74	4	M6x18	17
25	34	25	38	45	51	56	50	21	266	100	74	4	M6x18	17
28	39	25	38	45	51	61	55	27	373	112	81	5	M6x18	17
30	41	25	38	45	51	63	57	32	480	126	92	6	M6x18	17
32	43	30	43	50	56	65	59	32	511	98	73	6	M6x18	17
35	47	30	43	50	56	69	63	43	747	120	89	8	M6x18	17
38	50	30	43	50	56	72	66	43	811	110	84	8	M6x18	17
40	53	32	45	52	58	75	69	48	959	110	83	9	M6x18	17
42	55	32	45		58	77	71	48	1007	105	80	9	M6x18	17
45	59	40	56	64	72	85	79	79	1781	130	99	8	M8x22	42
48	62	40	56	64	72	88	82	79	1900	122	94	8	M8x22	42
50	65	50	66	74	82	92	85	99	2473	117	90	10	M8x22	42
55	71	50	66	74	82	98	91	99	2721	106	82	10	M8x22	42
60	77	50	66	74	82	104	97	99	2968	97	76	10	M8x22	42
65	84		66	74	82	111	104	99	3215	90	69	10	M8x22	42
70	90	60	80	91	101	122	115	127	4430	89	69	8	M10x25	84
75	95	60	80	91	101	126	119	142	5338	93	74	9	M10x25	84
80	100	65	85	96	106	131	124	190	7595	108	86	12	M10x25	84
85	106	65	85	96	106	137	130	190	8069	101	81	12	M10x25	84
90	112	65	85	96	106	143	136	222	9968	112	90	14	M10x25	84
95	120	65	85	96	106	153	144	222	10522	106	84	14	M10x25	84
100	125	65	89	102	114	162	153	273	13651	124	99	12	M12x30	145
110	140	70	94	107	119	177	168	273	15016	105	82	12	M12x30	145
120	155	90	114	127	139	195	185	364	21844	99	77	16	M12x30	145
130	165	90	114	127	139	205	195	364	23664	92	72	16	M12x30	145
140	175	90	114	127	139	215	205	364	25485	85	68	16	M12x30	145
150	185	90	114	127	139	225	215	364	27305	80	64	16	M12x30	145

推荐安装尺寸

Recommended Dimensions:

名义尺寸小于等于38mm

Basic Dimension: ≤38mm

轴: h6 Shaft: h6

毂: H7 Hub: H7

名义尺寸大于等于40mm


Basic Dimension: ≥40mm:

轴: h8 Shaft: h8

毂: H8 Hub: H8

类似JB/T 7934 Z1标准

Similar to JB/T 7934 Z1 Standard

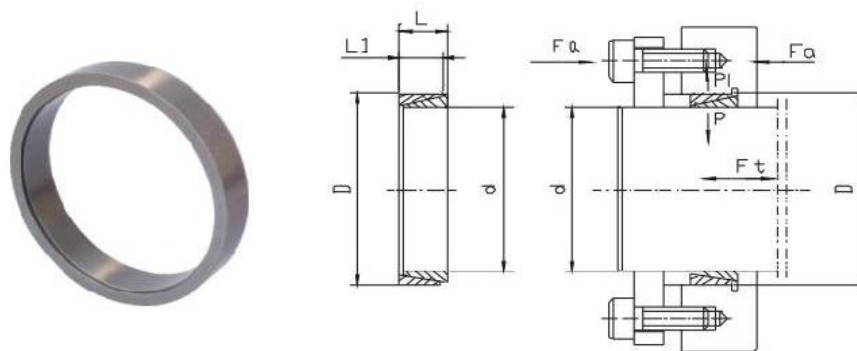

尺寸 Dimensions				加载的轴向压力 Loaded Axial Pressure	传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure	
							轴Shaft	毂Hub
ϕd	ϕD	L	L1	F_a	F_t	M_t	P	P1
mm	mm	mm	mm	KN	KN	Nm	N/mm ²	N/mm ²
8	11	4.5	3.7	5.0	1.06	4.2	100	70
9	12	4.5	3.7	13.3	1.29	5.8	100	79
10	13	4.5	3.7	14.4	1.53	7.6	100	86
12	15	4.5	3.7	14.5	1.65	9.9	100	80
13	16	4.5	3.7	14.6	1.76	11.5	100	81
14	18	6.3	5.3	23.8	2.70	18.9	100	77
15	19	6.3	5.3	24.3	2.94	22.1	100	79
16	20	6.3	5.3	24.5	3.18	25.4	100	81
17	21	6.3	5.3	24.9	3.29	28.0	100	80
18	22	6.3	5.3	25.3	3.53	31.8	100	82
19	24	6.3	5.3	29.7	3.76	35.8	100	80
20	25	6.3	5.3	30.1	3.88	38.8	100	79
22	26	6.3	5.3	28.9	4.35	47.9	100	86
24	28	6.3	5.3	30.0	4.70	56.4	100	86
25	30	6.3	5.3	32.4	4.94	61.7	100	84
28	32	6.3	5.3	32.6	5.53	77.4	100	88
30	35	6.3	5.3	35.5	5.88	88.2	100	86
32	36	6.3	5.3	36.7	6.23	100.0	100	88
35	40	7.0	6.0	45.7	7.76	136.0	100	88
36	42	7.0	6.0	48.2	8.00	144.0	100	86
38	44	7.0	6.0	49.7	8.47	161.0	100	87
40	45	8.0	6.6	58.8	9.80	195.0	100	89
42	48	8.0	6.6	62.6	10.20	215.0	100	87
45	52	10.0	8.6	92.2	14.30	323.0	100	87
48	55	10.0	8.6	94.6	15.30	367.0	100	88
50	57	10.0	8.6	96.5	15.90	397.0	100	88
55	62	10.0	8.6	101.8	17.40	479.0	100	88
56	64	12.0	10.4	128.4	21.50	603.0	100	88
60	68	12.0	10.4	133.4	23.00	691.0	100	88
63	71	12.0	10.4	137.3	24.20	763.0	100	89
65	73	12.0	10.4	140.4	25.00	814.0	100	89
70	79	14.0	12.2	176.0	31.60	1107.0	100	89
71	80	14.0	12.2	178.0	32.00	1136.0	100	89
75	84	14.0	12.2	189.6	33.80	1266.0	100	89
80	91	17.0	15.0	251.0	44.20	1769.0	100	88
90	10	17.0	15.0	272.4	49.90	2244.0	100	89
100	11	21.0	18.7	377.7	69.00	3452.0	100	88

推荐安装尺寸

Recommended Dimensions:

名义尺寸小于等于38mm

Basic Dimension: ≤38mm

轴: h6 Shaft: h6

毂: H7 Hub: H7

名义尺寸大于等于40mm


Basic Dimension: ≥40mm:

轴: h8 Shaft: h8

毂: H8 Hub: H8

类似JB/T 7934 Z1标准

Similar to JB/T 7934 Z1 Standard

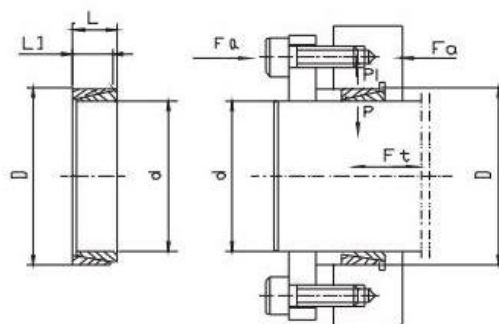


ϕd	ϕD	L	L1	F_a	F_t	M_t	P	P1
mm	mm	mm	mm	KN	KN	Nm	N/mm	N/mm ²
110	124	21.0	18.7	415.0	76.0	4178	100	89
120	134	21.0	18.7	440.2	82.8	4967	100	89
130	148	28.0	25.3	654.2	121.0	7896	100	88
140	158	28.0	25.3	689.0	131.0	9146	100	89
150	168	28.0	25.3	727.5	140.0	10505	100	89
160	178	28.0	25.3	764.5	149.0	11948	100	90
170	191	33.0	30.0	982.5	188.0	16014	100	89
180	201	33.0	30.0	1027.2	199.0	17950	100	90
190	211	33.0	30.0	1071.0	210.0	19987	100	90
200	224	38.0	34.8	1314.0	257.0	25696	100	89
210	234	38.0	34.8	1366.0	270.0	28326	100	90
220	244	38.0	34.8	1420.0	283.0	31098	100	90
230	257	43.0	39.5	1705.0	335.0	38570	100	89
240	267	43.0	39.5	1767.5	351.0	42068	100	90
250	280	48.0	44.0	2060.0	407.0	50906	100	90
260	290	48.0	44.0	2132.0	425.0	55205	100	90
270	300	48.0	44.0	2207.0	442.0	59678	100	91
280	313	53.0	49.0	2536.0	507.0	71042	100	90
290	323	53.0	49.0	2632.0	525.0	76103	100	90
300	333	53.0	49.0	2704.0	542.0	81338	100	90
320	360	65.0	59.0	3492.0	697.0	111504	100	89
340	380	65.0	59.0	3672.0	740.0	125870	100	89
360	400	65.0	59.0	3858.0	784.0	141106	100	90
380	420	65.0	59.0	4069.0	828.0	157235	100	90
400	440	65.0	59.0	4256.0	871.0	174213	100	91
420	460	65.0	59.0	4444.0	915.0	192085	100	91
440	480	65.0	59.0	4634.0	958	210805	100	92

推荐安装尺寸:
Recommended Dimensions:

轴: h8 Shaft:h8
毂: H8 Hub:H8

类似JB/T 7934 Z3标准
Similar to JB/T 7934 Z3 Standard

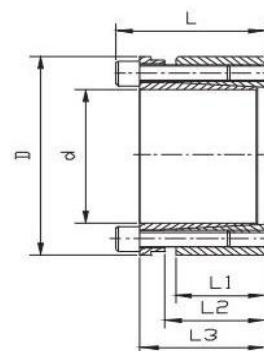


尺寸 Dimensions						传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN 912-12.9 级锁紧螺钉 D N912-12.9 Locking Screw		
								轴Shaft	毂Hub	数量	规格 Size	锁紧扭矩 Locking Torque
Φd	中D	L1	L2	L3	L	Ft	Mt	P	P1	n		Ts
mm	mm	mm	mm	mm	mm	KN	Nm	N/mm ²	N/mm ²			Nm
19	47	26	31	39	45	32	307	193	78	4	M6x25	17
20	47	26	31	39	45	32	323	183	78	4	M6x25	17
22	47	26	31	39	45	32	355	166	78	4	M6x25	17
24	50	26	31	39	45	48	582	229	110	6	M6x25	17
25	50	26	31	39	45	48	606	220	110	6	M6x25	17
28	55	26	31	39	45	48	679	196	100	6	M6x25	17
30	55	26	31	39	45	48	727	183	100	6	M6x25	17
32	60	26	31	39	45	65	1033	229	122	8	M6x25	17
35	60	26	31	39	45	65	1130	209	122	8	M6x25	17
38	65	26	31	39	45	65	1227	193	113	8	M6x25	17
40	65	26	31	39	45	65	1292	183	113	8	M6x25	17
42	75	30	36	47	55	87	1835	204	115	6	M8x30	41
45	75	30	36	47	55	87	1966	191	115	6	M8x30	41
48	80	30	36	47	55	87	2097	179	107	6	M8x30	41
50	80	30	36	47	55	87	2184	172	107	6	M8x30	41
55	85	30	36	47	55	116	3202	208	135	8	M8x30	41
60	90	30	36	47	55	116	3493	191	127	8	M8x30	41
65	95	30	36	47	55	116	3784	176	120	8	M8x30	41
70	110	40	46	57	67	189	6607	199	127	8	M10x35	83
75	115	40	46	62	72	189	7079	186	121	8	M10x35	83
80	120	40	46	62	72	189	7551	174	116	8	M10x35	83
85	125	40	46	62	72	236	10029	205	139	10	M10x35	83
90	130	40	46	62	72	236	10619	193	134	10	M10x35	83
95	135	40	46	62	72	236	11209	183	129	10	M10x35	83
100	145	46	52	77	89	275	13738	176	121	8	M12x45	145
110	155	46	52	77	89	275	15111	160	114	8	M12x45	145
120	165	46	52	77	89	343	20606	183	133	10	M12x45	145
130	180	46	52	77	89	412	26788	203	147	12	M12x45	145
140	190	51	59	84	98	373	26142	154	114	8	M14x45	230
150	200	51	59	84	98	467	35016	180	135	10	M14x45	230
160	210	51	59	84	98	467	37351	169	129	10	M14x45	230
170	225	51	59	84	98	560	47617	191	144	12	M14x45	230
180	235	51	59	84	98	560	50418	180	138	12	M14x45	230
190	250	51	59	84	98	700	66526	213	162	15	M14x45	230
200	260	51	59	84	98	700	70027	202	156	15	M14x45	230
220	285	64	72	100	116	757	83243	158	122	12	M16X60	355
240	305	64	72	100	116	946	113517	182	143	15	M16X60	355
260	325	64	72	100	116	1135	147560	201	161	18	M16X60	355
280	355	75	83	123	141	1226	171582	172	136	16	M18X80	485
300	375	75	83	123	141	1379	206809	181	145	18	M18X80	485
320	405	90	98	142	162	1766	282493	181	143	18	M20X100	690
340	425	90	98	142	162	2060	350180	199	159	21	M20X100	690
360	455	110	118	166	188	2164	389480	161	127	18	M22X110	930
380	475	110	118	166	188	2524	479634	178	142	21	M22X110	930
400	495	110	118	166	188	2524	504878	186	150	21	M22X110	930

推荐安装尺寸:

Recommended Dimensions:

轴 : h8 Shaft:h8

毂 : H8 Hub:H8



类似JB/T 7934 Z3B标准

Similar to JB/T 7934 Z3B Standard


尺寸 Dimensions						传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN 912-12.9 级 锁紧螺钉 DIN912-12.9 Locking Screw		
								轴Shaft	毂Hub	数量	规格 Size	锁紧扭矩 Locking Torque
φd	D	L1	L2	L3	L	Ft	Mt	P	P1	n		Ts
mm	mm	mm	mm	mm	mm	KN	Nm	N/mm	N/mm			Nm
19	47	17	22	28	34	29	273	262	106	5	M6x20	13
20	47	17	22	28	34	29	287	249	106	5	M6x20	13
22	47	17	22	28	34	29	316	227	106	5	M6x20	13
24	50	17	22	28	34	34	413	249	120	6	M6x20	13
25	50	17	22	28	34	34	431	239	120	6	M6x20	13
28	55	17	22	28	34	34	482	213	109	6	M6x20	13
30	55	17	22	28	34	34	517	199	109	6	M6x20	13
32	60	17	22	28	34	46	734	249	133	8	M6x20	13
35	60	17	22	28	34	46	803	227	133	8	M6x20	13
38	65	17	22	28	34	46	872	210	122	8	M6x20	13
40	65	17	22	28	34	46	918	199	122	8	M6x20	13
42	75	20	25	33	41	74	1563	261	146	7	M8x25	32
45	75	20	25	33	41	74	1674	244	146	7	M8x25	32
50	80	20	25	33	41	74	1860	219	137	7	M8x25	32
55	85	20	25	33	41	85	2340	228	148	8	M8x25	32
60	90	20	25	33	41	85	2553	209	139	8	M8x25	32
65	95	20	25	33	41	96	3110	217	149	9	M8x25	32
70	110	24	30	40	50	138	4838	243	154	8	M10x30	65
75	115	24	30	40	50	138	5184	226	148	8	M10x30	65
80	120	24	30	40	50	138	5530	212	142	8	M10x30	65
85	125	24	30	40	50	156	6610	225	153	9	M10x30	65
90	130	24	30	40	50	156	6998	212	147	9	M10x30	65
95	135	24	30	40	50	173	8208	223	157	10	M10x30	65
100	145	26	32	44	56	195	9742	221	152	8	M12x35	110
110	155	26	32	44	56	195	10716	201	143	8	M12x35	110
120	165	26	32	44	56	219	13154	207	151	9	M12x35	110
130	180	34	40	52	64	292	18996	195	141	12	M12x35	110
140	190	34	40	54	68	291	20336	180	133	9	M14x40	170
150	200	34	40	54	68	323	24211	187	140	10	M14x40	170
160	210	34	40	54	68	355	28408	192	147	11	M14x40	170
170	225	44	50	64	78	387	32929	153	115	12	M14x40	170
180	235	44	50	64	78	387	34866	144	110	12	M14x40	170
190	250	44	50	64	78	484	45996	171	130	15	M14x40	170
200	260	44	50	64	78	484	48416	162	125	15	M14x40	170
220	285	50	56	75	91	548	60291	147	113	12	M16x50	275
240	305	50	56	75	91	685	82218	168	132	15	M16x50	275
260	325	50	56	75	91	731	95009	166	133	16	M16x50	275
280	355	60	66	87	105	910	127341	160	126	16	M18x50	385
300	375	60	66	87	105	1023	153479	168	134	18	M18x50	385
320	405	74	81	101	121	1388	222065	140	110	18	M20×50	580
340	425	74	81	101	121	1619	275271	153	123	21	M20×50	580
360	455	86	94	116	138	1697	305480	131	104	18	M22×60	780
380	475	86	94	116	138	1980	376193	145	116	21	M22×60	780
400	495	86	94	116	138	1980	395993	137	111	21	M22×60	780

推荐安装尺寸:

Recommended Dimensions:

轴: h8 Shaft:h8

毂: H8 Hub:H8



类似JB/T 7934 Z13标准


Similar to JB/T 7934 Z13 Standard

尺寸 Dimensions							传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN912-12.9级锁紧螺钉 Locking Screw		
									轴Shaft	毂Hub	数量	规格 Size	锁紧扭矩 Locking Torque
ϕd	ϕD	$\phi D1$	L1	L2	L3	L	Ft	Mt	P	P1	n		Ts
mm	mm	mm	mm	mm	mm	mm	KN	Nm	N/mm ²	N/mm			Nm
19	47	53	26	31	39	45	21	202	127	51	4	M6x20	17
20	47	53	26	31	39	45	21	213	121	51	4	M6x20	17
22	47	53	26	31	39	45	21	234	110	51	4	M6x20	17
24	50	56	26	31	39	45	32	384	151	73	6	M6x20	17
25	50	56	26	31	39	45	32	400	145	73	6	M6x20	17
28	55	61	26	31	39	45	32	448	129	66	6	M6x20	17
30	55	61	26	31	39	45	32	480	121	66	6	M6x20	17
32	60	66	26	31	39	45	43	683	151	81	8	M6x20	17
35	60	66	26	31	39	45	43	747	138	81	8	M6x20	17
38	65	71	26	31	39	45	43	811	127	74	8	M6x20	17
40	65	71	26	31	39	45	43	853	121	74	8	M6x20	17
42	75	81	30	36	47	55	58	1216	135	76	6	M8x30	41
45	75	81	30	36	47	55	58	1302	126	76	6	M8x30	41
48	80	86	30	36	47	55	58	1389	119	71	6	M8x30	41
50	80	86	30	36	47	55	58	1447	114	71	6	M8x30	41
55	85	91	30	36	47	55	77	2124	138	89	8	M8x30	41
60	90	96	30	36	47	55	77	2317	127	84	8	M8x30	41
65	95	101	30	36	47	55	77	2510	117	80	8	M8x30	41
70	110	116	40	46	57	67	125	4381	132	84	8	M10x35	83
75	115	121	40	46	62	72	125	4694	123	80	8	M10x35	83
80	120	126	40	46	62	72	125	5007	115	77	8	M10x35	83
85	125	131	40	46	62	72	156	6651	136	92	10	M10x35	83
90	130	136	40	46	62	72	156	7042	128	89	10	M10x35	83
95	135	141	40	46	62	72	156	7433	121	85	10	M10x35	83
100	145	151	46	52	77	89	182	9104	117	81	8	M12x45	145
110	155	161	46	52	77	89	182	10015	106	75	8	M12x45	145
120	165	171	46	52	77	89	228	13653	122		10	M12x45	145
130	180	186	46	52	77	89	273	17747	135	97	12	M12x45	145
140	190	196	51	59	84	98	248	17328	102	75	8	M14x45	230
150	200	206	51	59	84	98	309	23207	119	89	10	M14x45	230
160	210	216	51	59	84	98	309	24754	112	85	10	M14x45	230
170	225	231	51	59	84	98	371	31561	126	95	12	M14x45	230
180	235	241	51	59	84	98	371	33417	119	91	12	M14x45	230
190	250	256	51	59	84	98	464	44097	141	107	15	M14x45	230
200	260	266	51	59	84	98	464	46418	134	103	15	M14x45	230
220	285	291	64	72	100	116	501	55147	105	81	12	M16X60	355
240	305	311	64	72	100	116	627	75207	120	95	15	M16X60	355
260	325	331	64	72	100	116	752	97775	133	107	18	M16X60	355
280	355	361	75	83	123	141	812	113657	114	90	16	M18X80	485
300	375	381	75	83	123	141	913	136987	120	96	18	M18X80	485
320	405	411	90	98	142	162	1170	187177	120	95	18	M20X100	690
340	425	431	90	98	142	162	1365	232015	132	105	21	M20X100	690
360	455	461	110	118	166	188	1433	257988	107	84	18	M22X110	930
380	475	481	110	118	166	188	1672	317711	118	94	21	M22X110	930
400	495	501	100	118	166	188	1672	334433	123	100	21	M22X110	930

推荐安装尺寸:
Recommended Dimensions:

轴: h8 Shaft:h8
毂: H8 Hub:H8

类似JB/T 7934 Z8标准
Similar to JB/T 7934 Z8 Standard

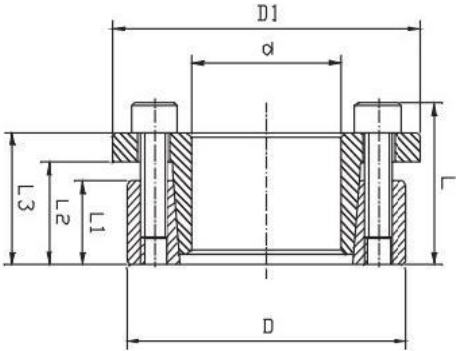

尺寸 Dimensions							传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN 912-12.9 级锁紧螺钉 DIN912-12.9 Locking Screw			
									轴Shaft	毂Hub	数量 n	规格 Size	锁紧扭矩 Locking Torque	
									P	P1			Ts	Nm
Φ d	Φ D	Φ D1	L1	L2	L3	L	Ft	Mt	N/mm	N/mm				
mm	mm	mm	mm	mm	mm	mm	KN	Nm						
19	47	56	17	22	28	34	26	243	234	94	5	M6x20	17	
20	47	56	17	22	28	34	26	256	222	94	5	M6x20	17	
22	47	56	17	22	28	34	26	282	202	94	5	M6x20	17	
24	50	59	17	22	28	34	31	368	222	106	6	M6x20	17	
25	50	59	17	22	28	34	31	383	213	106	6	M6x20	17	
28	55	64	17	22	28	34	31	429	190	97	6	M6x20	17	
30	55	64	17	22	28	34	31	460	177	97	6	M6x20	17	
32	60	69	17	22	28	34	41	655	222	118	8	M6x20	17	
35	60	69	17	22	28	34	41	716	203	118	8	M6x20	17	
38	65	74	17	22	28	34	41	778	187	109	8	M6x20	17	
40	65	74	17	22	28	34	41	819	178	109	8	M6x20	17	
42	75	84	20	25	33	41	65	1361	227	127	7	M8x25	41	
45	75	84	20	25	33	41	65	1458	212	127	7	M8x25	41	
50	80	89	20	25	33	41	65	1620	191	119	7	M8x25	41	
55	85	94	20	25	33	41	74	2037	199	129	8	M8x25	41	
60	90	99	20	25	33	41	74	2223	182	121	8	M8x25	41	
65	95	104	20	25	33	41	83	2710	189	129	9	M8x25	41	
70	110	119	24	30	40	50	120	4203	211	134	8	M10x30	83	
75	115	124	24	30	40	50	120	4754	197	128	8	M10x30	83	
80	120	129	24	30	40	50	120	4804	184	123	8	M10x30	83	
85	125	134	24	30	40	50	135	5742	195	133	9	M10x30	83	
90	130	139	24	30	40	50	135	6080	184	128	9	M10x30	83	
95	135	144	24	30	40	50	150	7131	194	137	10	M10x30	83	
100	145	154	26	32	44	56	175	8732	198	137	8	M12x35	145	
110	155	164	26	32	44	56	175	9605	180	128	8	M12x35	145	
120	165	174	26	32	44	56	196	11787	186	135	9	M12x35	145	
130	180	189	34	40	52	64	262	17024	175	126	12	M12x35	145	
140	190	199	34	40	54	68	267	18703	166	122	9	M14x40	230	
150	200	209	34	40	54	68	297	22259	172	129	10	M14x40	230	
160	210	219	34	40	54	68	326	26119	177	135	11	M14x40	230	
170	225	234	44	50	64	78	356	30276	140	106	12	M14x40	230	
180	235	244	44	50	64	78	356	32057	133	102	12	M14x40	230	
190	250	259	44	50	64	78	445	42302	157	119	15	M14x40	230	
200	260	269	44	50	64	78	445	44528	149	115	15	M14x40	230	
220	285	295	50	56	75	91	481	52902	129	100	12	M16x50	355	
240	305	315	50	56	75	91	601	72135	148	116	15	M16x50	355	
260	325	335	50	56	75	91	641	83370	145	116	16	M16x50	355	
280	355	365	60	66	87	105	803	112463	141	111	16	M18x50	500	
300	375	385	60	66	87	105	904	135562	148	118	18	M18x50	500	
320	405	414	74	81	101	121	1234	197493	140	110	18	M20x50	690	
340	425	434	74	81	101	121	1440	244816	153	123	21	M20x50	690	
360	455	464	86	94	116	138	1512	272218	131	104	18	M22x60	930	
380	475	484	86	94	116	138	1764	335239	145	116	21	M22x60	930	
400	495	504	86	94	116	138	1764	352884	137	111	21	M22x60	930	


Shrink Discs

标准型锁紧盘

Standard Type

类似JB/T 7934 Z7B标准

Similar to JB/T 7934 Z7B Standard



尺寸 Dimensions							传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	DIN931-10.9级锁紧螺钉 DIN931-10.9 Locking Screw		
ϕd	ϕD	d_w	L1	L2	L	C(dw-d1)最大 间隙C(dw-d1) Max. Clearance			数量 n	规格 Size	锁紧扭矩 Locking Torque
mm	mm	mm	mm	mm	mm	mm	Pt KN	Mt Nm			TS Nm
24	50	19	14	19.5	23	0.017	23	216	6	M5x18	4
		20					27	265			
		21					30	314			
		24					31	372			
30	60	25	16	21.5	25	0.017	34	421	7	M5x18	4
		26					36	461			
		26					36	471			
		28					40	550			
36	72	30	18	23.5	27.5	0.032	48	713	5	M6x20	12
		32					58	925			
		35					67	1175			
44	80	36	20	25.5	29.5	0.032	71	1275	7	M6x20	12
		38					69	1313			
		40					82	1638			
50	90	42	22	27.5	31.5	0.032	92	1925	8	M6x25	12
		42					69	1450			
		45					84	1900			
55	100	48	23	30.5	34.5	0.032	98	2350	8	M6x25	12
		48					116	2775			
		50					131	3275			
62	110	52	23	30.5	34.5	0.048	139	3613	10	M6x25	12
		50					100	2500			
		55					114	3125			
68	115	60	23	30.5	34.5	0.048	131	3938	10	M6x25	12
		55					114	3125			
		60					133	4000			
75	138	65	25	32.5	37.8	0.048	152	4938	7	M8x30	30
		60					133	4000			
		65					150	4875			
80	145	70	25	32.5	37.8	0.048	164	5750	7	M8x30	30
		65					183	5938			
		70					214	7500			
90	155	75	30	39	44.3	0.048	242	9063	10	M8x35	30
		70					246	8625			
		75					250	9375			
100	170	80	34	44	49.3	0.048	281	11250	12	M8x35	30
		75					240	9000			
		80					281	11250			
110	185	85	39	50	56.4	0.048	318	13500	9	M10x40	59
		85					271	11500			
		90					350	15750			
115	188	95	39	50	57	0.048	395	18750	10	M10x40	59
		85					324	13750			
		90					361	16250			
125	215	95	42	54	60.4	0.069	395	18750	12	M10x40	59
		95					397	18875			
		100					440	22000			
140	230	105	46	60.5	68	0.069	479	25125	10	M12x45	100
		105					524	27500			
		110					568	31250			
155	265	115	50	64.5	72	0.069	609	35000	12	M12x50	100
		115					674	38750			
		120					729	43750			
165	290	125	56	71	81	0.069	780	48750	8	M16x55	250
		125					720	45000			
		130					788	51250			
175	300	135	56	71	81	0.079	833	56250	8	M16x55	250
		135					963	65000			
		140					1018	71250			
185	330	145	71	86	96	0.079	1069	77500	10	M16x65	250
		140					1161	81250			
		150					1267	95000			
195	350	155	71	86	96	0.079	1315	101875	12	M16X65	250
		155					1315	101875			


Shrink Discs

标准型锁紧盘

Standard Type

类似JB/T 7934 Z7B标准

Similar to JB/T 7934 Z7B Standard




尺寸 Dimensions							传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	DIN 931-10.9 级锁紧螺钉 N931-10.9 Locking Screw		
φ d	φ D	φ dw	L1	L2	L	C(dw-d1) 最大 间隙C(dw-d1) Max. Clearance			数量 N	规格 Size	锁紧扭矩 Locking Torque
mm	mm	mm	mm	mm	mm	mm	Ft KN	Mt Nm			Ts Nm
200	350	150	71	86	96	0.079	1233	92500	12	M16X65	250
		155					1290	100000			
		160					1344	107500			
220	370	160	88	104	114	0.079	1484	118750	15	M16X75	250
		165					1545	127500			
		170					1618	137500			
240	405	170	92	109	122	0.079	1765	150000	12	M20X80	490
		80					1917	172500			
		190					2053	195000			
260	430	190	103	120	133	0.09	2158	205000	14	M20X90	490
		200					2300	230000			
		210					2440	256250			
280	460	210	114	134	147	0.09	2583	271250	16	M20X100	490
		220					2773	305000			
		230					2935	337500			
300	485	230	122	142	155	0.09	2989	343750	18	M20X100	490
		240					3073	368750			
		245					3214	393750			
320	520	240	122	142	155	0.09	3250	390000	20	M20X100	490
		250					3400	425000			
		260					3596	467500			
340	570	250	134	156	169	0.101	3900	487500	24	M20X110	490
		260					4063	528125			
		270					4259	575000			
350	580	270	140	162	175	0.101	4093	552500	24	M20X110	490
		280					4286	600000			
		285					4386	625000			
360	590	280	140	162	175	0.101	4134	578750	24	M20X110	490
		290					4328	627500			
		295					4424	822500			
380	645	290	144	168	183	0.101	4888	708750	20	M24X120	840
		300					5083	762500			
		310					5306	822500			
390	660	300	144	168	183	0.101	5200	780000	21	M24X120	840
		310					5411	838750			
		320					5609	897500			
400	680	315	144	168	183	0.111	5317	837500	21	M24X120	840
		320					5430	868750			
		330					5636	930000			
420	690	330	164	188	203	0.111	5909	975000	24	M24X130	840
		340					6176	1050000			
		350					6429	1125000			
440	750	340	177	202	217	0.111	5926	1007500	24	M24X140	840
		350					6143	1075000			
		360					6368	1146250			
460	770	360	177	202	217	0.111	6944	250000	28	M24X140	840
		370					7230	1337500			
		380					9211	1750000			
480	800	380	188	213	228	0.111	7697	462500	30	M24X140	840
		390					7949	1550000			
		400					8188	1637500			
500	850	400	188	213	230	0.123	7213	1442500	24	M27X150	1100
		410					7405	1518000			
		420					7619	1600000			
530	910	430	213	238	255	0.123	10581	2275000	30	M27X160	1100
		440					11023	2425000			
		450					11444	2575000			
560	940	450	228	260	277	0.123	11111	2500000	30	M27X160	1100
		460					11576	2662500			
		470					12021	2825000			

推荐安装尺寸:

Recommended Dimensions:

轴: h8 Shaft:h8

毂: H8 Hub:H8

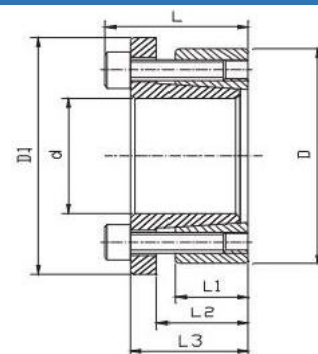

类似JB/T 7934 Z6标准

Similar to JB/T 7934 Z6 Standard


尺寸 Dimensions							传递的轴向力 Transmitted Axial Force	传递扭矩 Transmittedj Torque	接触面压强 Contacting Pressure		DIN912-12.9 级锁紧螺钉 DIN912-12.9 Locking Screw		
Φd	ΦD	ΦD1	L1	L2	L3	L			轴Shaft	毂Hub	数量	规格 Size	锁紧扭矩 Locking Torque
mm	mm	mm	mm	mm	mm	mm	Ft KN	Mt Nm	P N/mm ²	P1 N/mm	n		Ts Nm
14	55	62	17	22	30	38	37	259	415	106	4	M8x25	41
16	55	62	17	22	30	38	37	296	363	106	4	M8x25	41
18	55	62	17	22	30	38	37	333	357	117	4	M8x25	41
19	55	62	17	22	30	38	37	352	338	117	4	M8x25	41
20	55	62	17	22	30	38	37	370	321	117	4	M8x25	41
22	55	62	17	22	30	38	37	407	292	117	4	M8x25	41
24	55	62	17	22	30	38	37	445	268	117	4	M8x25	41
25	55	62	17	22	30	38	37	463	257	117	4	M8x25	41
28	55	62	17	22	30	38	37	519	229	117	4	M8x25	41
30	55	62	17	22	30	38	37	556	214	117	4	M8x25	41
24	65	72	17	22	30	38	46	556	335	124	5	M8x25	41
25	65	72	17	22	30	38	46	579	321	124	5	M8x25	41
28	65	72	17	22	30	38	46	649	287	124	5	M8x25	41
30	65	72	17	22	30	38	46	695	268	124	5	M8x25	41
32	65	72	17	22	30	38	46	741	251	124	5	M8x25	41
35	65	72	17	22	30	38	46	811	230	124	5	M8x25	41
38	65	72	17	22	30	38	46	917	211	124	5	M8x25	41
40	65	72	17	22	30	38	46	966	201	124	5	M8x25	41
30	80	87	20	25	33	41	65	972	318	119	7	M8x25	41
32	80	87	20	25	33	41	65	1037	299	119	7	M8x25	41
35	80	87	20	25	33	41	65	1134	273	119	7	M8x25	41
38	80	87	20	25	33	41	65	1231	251	119	7	M8x25	41
40	80	87	20	25	33	41	65	1296	239	119	7	M8x25	41
42	80	87	20	25	33	41	65	1361	227	119	7	M8x25	41
45	80	87	20	25	33	41	65	1458	212	119	7	M8x25	41
48	80	87	20	25	33	41	65	1555	199	119	7	M8x25	41
50	80	87	20	25	33	41	65	1620	191	119	7	M8x25	41

推荐安装尺寸:

Recommended Dimensions:

轴: h8 Shaft:h8

毂: H8 Hub:H8




尺寸 Dimensions				传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN 912-12.9 级 锁紧螺钉 D N912-12.9 Locking Screw		
						轴 Shaft	毂 Hub	数量 n	规格 Size	锁紧扭矩 Locking Torque
ϕd	ϕD	H	h1	Ft	Mt	P	P1			Ts
mm	mm	mm	mm	KN	Nm	N/mm ²	N/mm ²			Nm
16	32	22	18	8	66	93	47	4	M4x16	5.1
18	40	24	18	18	165	185	83	4	M6x16	17
19	41	24	18	18	174	176	81	4	M6x16	17
20	42	24	18	18	183	167	79	4	M6x16	17
22	44	24	18	18	201	152	76	4	M6x16	17
24	46	24	18	27	329	209	109	6	M6x16	17
25	47	24	18	27	343	200	106	6	M6x16	17
28	50	24	18	27	384	179	100	6	M6x16	17
30	52	24	18	27	412	167	96	6	M6x16	17
32	54	24	18	27	439	156	93	6	M6x16	17
35	57	28	22	27	480	117	72	6	M6x18	17
36	58	28	22	37	659	151	94	8	M6x18	17
38	60	28	22	37	695	143	91	8	M6x18	17
40	62	28	22	37	732	136	88	8	M6x18	17
42	70	36	28	68	1427	185	111	8	M8x25	42
45	73	36	28	68	1529	172	106	8	M8x25	42
48	76	36	28	68	1631	161	102	8	M8x25	42
50	78	36	28	68	1699	155	99	8	M8x25	42
55	83	36	28	68	1869	141	93	8	M8x25	42
60	88	36	28	68	2039	129	88	8	M8x25	42
65	93	45	35	68	2208	93	65	8	M8x25	42
70	105	45	35	107	3759	137	91	8	M10x30	83
75	110	45	35	107	4027	128	87	8	M10x30	83
80	115	45	35	107	4296	120	83	8	M10x30	83
85	120	45	35	134	5705	141	100	10	M10x30	83
90	125	45	35	134	6041	133	96	10	M10x30	83
100	138	45	35	134	6712	120	87	10	M10x30	83

推荐安装尺寸:

Recommended Dimensions:

轴: h8 Shaft:h8

毂: H8 Hub:H8



类似JB/T 7934 Z21标准
Similar to JB/T 7934 Z21 Standard

尺寸 Dimensions				传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure		DIN912-12.9级锁紧螺钉 DIN912-12.9 Locking Screw		
						轴Shaft	毂Hub	数量	规格	锁紧扭矩
						P	P1	n	Size	Locking Torque
d	D	L	L1	Ft	Mt	N/mm	N/mm²			TS
mm	mm	mm	mm	KN	Nm					Nm
10	20	15.5	13	3.8	19	89	45	4	M2.5X12	1.2
11	22	15.5	13	3.8	21	81	41	4	M2.5X12	1.2
12	22	15.5	13	3.8	23	75	41	4	M2.5X12	1.2
14	26	20.0	17	5.5	39	71	38	4	M3X16	2.1
15	28	20.0	17	5.5	42	66	35	4	M3X16	2.1
16	32	21.0	17	9.6	77	107	54	4	M4X16	4.9
17	35	25.0	21	9.6	82	81	40	4	M4X20	4.9
18	35	25.0	21	9.6	87	77	40	4	M4X20	4.9
19	35	25.0	21	9.6	91	73	40	4	M4X20	4.9
20	38	26.0	21	15.7	157	113	60	4	M5X20	10
22	40	26.0	21	15.7	173	103	57	4	M5X20	10
24	47	32.0	26	22.3	268	110	56	4	M6X24	17
25	47	32.0	26	22.3	279	105	56	4	M6X24	17
28	50	32.0	26	33.5	468	141	79	6	M6X24	17
30	55	32.0	26	33.5	502	132	72	6	M6X24	17
32	55	32.0	26	33.5	535	123	72	6	M6X24	17
35	60	37.0	31	44.6	781	125	73	8	M6X28	17
38	65	37.0	31	44.6	848	115	67	8	M6X28	17
40	65	37.0	31	44.6	892	110	67	8	M6X28	17
42	75	44.0	36	60.6	1272	122	68	6	M8X34	41
45	75	44.0	36	60.6	1363	113	68	6	M8X34	41
48	80	44.0	36	80.8	1938	142	85	8	M8X34	41
50	80	44.0	36	80.8	2019	136	85	8	M8X34	41

推荐安装尺寸


Recommended Dimensions:

轴: h8 Shaft:h8

毂: H8 Hub:H8


类似JB/T 7934 Z12A标准

Similar to JB/T 7934 Z12A Standard



尺寸 Dimensions					传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted l orque	接触面压强 Contacting Pressure		DIN912-12.9级锁紧螺钉 DIN912-12.9 Locking Screw		
							轴Shaft	毂Hub	数量	规格 Size	锁紧扭矩 Locking Torque
d	D	H	H1	H2	Ft	Mt	P	P1	n		TS
mm	mm	mm	mm	mm	KN	Nm	N/mm ²	N/mm			Nm
25	55	46	40	32	64	799	314	107	6	M6X35	17
28	55	46	40	32	64	895	281	107	6	M6X35	17
30	55	46	40	32	64	959	262	107	6	M6X35	17
35	60	60	54	44	75	1306	185	83	7	M6X45	17
38	75	62	54	44	135	2567	308	121	7	M8X50	41
40	75	62	54	44	135	2702	293	121	7	M8X50	41
42	75	62	54	44	135	2837	279	121	7	M8X50	41
45	75	62	54	44	135	3040	260	121	7	M8X50	41
48	80	72	64	56	154	3707	216	102	8	M8X55	41
50	80	72	64	56	154	3861	207	102	8	M8X55	41
55	85	72	64	56	174	4779	212	108	9	M8X55	41
60	90	72	64	56	193	5793	216	113	10	M8X55	41
65	95	72	64	56	193	6276	199	107	10	M8X55	41
70	110	88	78	70	313	10951	235	120	10	M10X60	83
75	115	88	78	70	313	11733	220	115	10	M10X60	83
80	120	88	78	70	344	13768	227	121	11	M10X60	83
85	125	88	78		376	15959	233	127	12	M10X60	83
90	130	88	78	70	376	16898	220	122	12	M10X60	83
95	135	88	78	70	376	17837	208	117	12	M10X60	83
100	145	112	100	90	501	25029	211	113	11	M12X80	145
110	155	112	100	90	546	30039	209	115	12	M12X80	145
120	165	112	100	90	637	38226	224	127	14	M12X80	145
130	180	130	116	104	743	48270	201	117	12	M14X90	230
140	190	130	116	104	866	60654	217	129	14	M14X90	230
150	200	130	116	104	928	69628	217	132	15	M14X90	230
160	210	130	116	104	990	79220	217	134	16	M14X90	230
170	225	164	148	134	1186	100851	206	116	14	M16X110	360
180	235	164	148	134	1271	114414	208	119	15	M16X110	360
190	250	164	148	134	1356	128814	210	119	16	M16X110	360
200	260	164	148	134	1356	135594	200	115	16	M16X110	360
220	285	164	148	134	1526	167805	204	118	18	M16X110	360
240	305	166	150	134	1626	195100	182	131	20	M16X110	360
260	325	166	150	134	1707	221930	176	129	21	M16X110	360
280	355	197	177	165	2244	314194	179	131	18	M20X130	690
300	375	197	177	165	2494	374042	186	138	20	M20X130	690
320	405	197	177	165	2618	418936	183	134	21	M20X130	690
340	425	197	177	165	2743	466307	180	134	22	M20X130	690
360	455	225	203	190	3208	577426	173	130	21	M22X150	930
380	475	225	203	190	3361	638541	172	130	22	M22X150	930
400	495	225	203	190	3666	733255	178	137	24	M22X150	930
420	515	225	203	190	3666	769918	169	131	24	M22X150	930
440	535	225	203	190	3666	807670	162	130	24	M22X150	930
460	555	225	203	190	3666	844390	155	128	24	M22X150	930
480	575	225	203	190	4275	1027650	173	145	28	M22X150	930
500	595	225	203	190	4275	1071000	166	140	28	M22X150	930
520	615	225	203	190	4600	1193400	171	144	30	M22X150	930
540	635	225	203	190	4600	1239300	164	139	30	M22X150	930
560	655	225	203	190	4896	1371050	169	144	32	M22X150	930
580	675	225	203	190	4896	1419500	163	141	32	M22X150	930
600	695	225	203	190	5040	1514700	163	141	33	M22X150	930

推荐安装尺寸:
Recommended Dimensions:



轴: h8 Shaft:h8

尺寸 Dimensions						传递的轴向力 Transmitted Axial Force	传递扭矩 Transmitted Torque	接触面压强 Contacting Pressure	GB70 ~ 8512 . 9级锁紧螺钉 GB70-85-12.9 Locking Screw		
								轴Shaf	数量	规格 Size	锁紧扭矩 Locking Torque
d	D	L	L1	L2	L3	Ft	Mt	P	n		Ts
mm	mm	mm	mm	mm	mm	KN	Nm	N/mm ²			Nm
15	45	56	50	16	44	21	158	188	4	M6X45	17
16	50	56	50	16	44	21	168	176	4	M6X45	17
17	50	56	50	16	44	21	179	166	4	M6X45	17
18	50	56	50	16	44	21	190	157	4	M6X45	17
19	50	56	50	16	44	21	200	149	4	M6X45	17
20	50	56	50	16	44	21	211	141	4	M6X45	17
24	55	66	60	19	54	32	378	144	6	M6X55	17
25	55	66	60	19	54	32	394	138	6	M6X55	17
28	60	66	60	19	54	32	442	123	6	M6X55	17
30	60	66	60	19	54	32	473	115	6	M6X55	17
32	63	66	60	19	54	32	505	108	6	M6X55	17
35	75	83	75	22	67	39	682	98	4	M8X70	42
38	75	83	75	22	67	39	741	90	4	M8X70	42
40	75	83	75	22	67	39	780	86	4	M8X70	42
42	78	83	75	22	67	39	819	82	4	M8X70	42
45	85	93	85	25	76	59	1317	101	6	M8X80	42
48	90	93	85	25	76	59	1405	95	6	M8X80	42
50	90	93	85	25	76	59	1463	91	6	M8X80	42
55	94	93	85	25	76	78	2147	110	8	M8X80	42
60	100	93	85	25	76	78	2343	101	8	M8X80	42
65	105	93	85	25	76	78	2538	93	8	M8X80	42
70	115	110	100	29	90	93	3239	87	6	M10X95	83
75	120	110	100	29	90	93	3471	81	6	M10X95	83